


SheltersDirect

"first choice"

Bullet Resistant Guard Booths & Enclosures

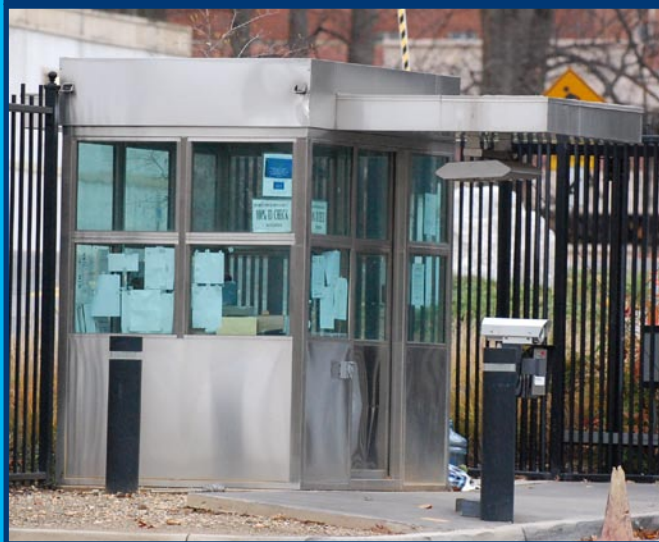

Contract Holder

Providing Superior Products At A Competitive Price With On-Time Delivery

- Military Entrance & Inspection Gates
- Access Control Locations
- Chemical, Utility, and Nuclear Plants
- Government Buildings & Facilities
- Casino Gaming Facilities
- Telecommunication Sites
- Gas Station Kiosks
- Airport Security Enclosures
- Parking Booths
- Cashier & Ticket Booths
- Highway Toll Booths
- Check Cashing Enclosures

BULLET RESISTANT



Contract Holder

BULLET RESISTANT



UL (Underwriters Laboratories) 752 Bullet Resistant Ratings:

Rating	Ammunition	Weight (grains)	Weight (grams)	min fps	max fps	Number of shots
Level 1	9mm Full Metal Copper Jacket with Lead Core	124	8	1175	1293	3
Level 2	.357 Magnum Jacketed Lead Soft Point	158	10.2	1250	1375	3
Level 3	.44 Magnum Lead Semi-Wadcutter Gas Checked	240	15.6	1350	1485	3
Level 4	.30 Caliber Rifle Lead Core Soft Point (.30-06 Caliber)	180	11.7	2540	2794	1
Level 5	7.62mm Rifle Lead Core Full Metal Copper Jacket Military Ball (.308 Caliber)	150	9.7	2750	3025	1
Level 6	9mm Full Metal Copper Jacket with Lead Core	124	8	1400	1540	5
Level 7	5.56mm Rifle Full Metal Copper Jacket with Lead Core (.223 Caliber)	55	3.56	3080	3383	5
Level 8	7.62mm Rifle Lead Core Full Metal Copper Jacket Military Ball (.308 Caliber)	150	9.7	2750	3025	5
Shotgun	12-Gauge Rifled Lead Slug	1 oz.	28.3	1585	1744	3
	12-Gauge 00 Buckshot (12 pellets)	1.5 oz.	42	1200	1320	3

OPTIONS

STRUCTURAL FEATURES & OPTIONS:

- Bullet Resistant Walls, Floors & Ceilings
- Swing and/or Sliding Doors (full glass, half glass, vision panel, or solid without glass)
- Heavy Duty Door Closers and Hinges
- Automatic Door Openers
- Panic Bar Exit Devices
- Many different locking mechanisms
- Gun Ports
- Pass Thru Compartments
- Built In Restroom Facilities (ADA Compliant)
- Raised / Elevated Platforms

GLAZING FEATURES & OPTIONS:

- Laminated Bullet Resistant Glass
- Polycarbonate Bullet Resistant Glass
- Fixed and Operable Windows
- Tinted Glass
- Reflective Glass Film

HVAC & ELECTRICAL FEATURES & OPTIONS:

- Properly Sized HVAC (roof mount, thru wall, packaged systems)
- Bullet Resistant Air Conditioner Shrouds
- Forced Air & Infrared Heating (interior and exterior)
- Exhaust Fans
- Factory Wired Load Centers
- Exterior Mounted Generator Flanged Power Adapter
- Provisions For Security Equipment
- Exterior Mounted Security & Flood Lights
- Thru Wall Intercom Devices

OTHER ITEMS:

- Professional Engineered (PE) Stamped Drawings
- 3rd Party Approvals
- Bullet Resistant Certifications
- Brick and Stone Coping Preparation
- Custom Cabinet & Casework
- Portable Trailers (with & without a generator)

TYPICAL BUILDING SIZES

OTHER SIZES AVAILABLE UPON REQUEST

- 3x4
- 4x4
- 4x5
- 4x6
- 4x7
- 4x8
- 4x10
- 5x5
- 5x6
- 5x7
- 5x8
- 5x9
- 5x10
- 5.5x7.5
- 6x6
- 6x8
- 6x10
- 6x12
- 8x8
- 8x10
- 8x12
- 8x14
- 8x16
- 10x10
- 10x12
- 10x14
- 10x16
- 12X12
- 12X14
- 12X16

National Institute of Justice (NIJ) 018.01 Ballistic Ratings

Threat Level Rating	Ammunition	Weight (grains)	Weight (grams)	Min/Max (meters/sec)	Min/Max (feet/sec)	Number of shots
Level I	.22 long rifle high velocity lead	40	2.6	320 +/- 12	1050 +/- 40	5
Level I	.38 special round nose lead	158	10.2	259 +/- 15	850 +/- 50	5
Level II	.357 mag. jacketed soft point	158	10.2	425 +/- 15	1395 +/- 50	5
Level II	9mm full metal jacket	124	8	358 +/- 12	1175 +/- 40	5
Level IIIA	.357 mag. jacketed soft point	158	10.2	381 +/- 15	1250 +/- 50	5
Level IIIA	9mm full metal jacket	124	8	332 +/- 12	1090 +/- 40	5
Level III	7.62mm (.308 Winchester) full metal jacket	150	9.7	838 +/- 15	2750 +/- 50	5
Level IIIA	.44 mag. lead semi-wadcutter gas checked	240	15.55	426 +/- 15	1400 +/- 50	5
Level IIIA	9 mm full metal jacket	124	8	426 +/- 15	1400 +/- 50	5
Level IV	.30-06 armor piercing	166	10.8	868 +/- 15	2850 +/- 50	1



ADA compliant available upon request



SheltersDirect

8580 Laureldale Drive • Laurel, MD 20724
Phone: 301/317-6000 • Fax: 301/317-8265 • www.sheltersdirect.com

800/393-9400